



JINTEX

Sewing Machine Spare Parts

Taiwan Basic DD/CC Catalog

Sewing Machine Part Book

28 pages

STITCHING AUTOMATIC THREAD CUTTING SERIES

· 绷缝自动剪线系列 ·



MAIN FEATURES · 主要特点 ·

1. 伺服电机、噪音小、振动小、温升低。
 2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
 3. 停针定位准确，精度 $\leq \pm 1$ 。
 4. 大力矩输出，高速响应，启停迅速。
 5. 更高效、更省电、更安全、更环保。
 6. 界面简便、功能强大的面板可供参数任意调整设定。
 7. 适用广，可适用于薄、中、厚料。
1. Servo motor, low noise, low vibration, low temperature rise.
 2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
 3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
 4. Strong torque output, high-speed response, quick start and stop.
 5. More efficient, more power saving, safer and more environmentally friendly.
 6. Simple interface and powerful panel for parameter adjustment and setting.
 7. Wide application, can be applied to thin, medium and thick materials.

APPLICABLE MODEL · 使用机型 ·



STITCH 787 AUTOMATIC THREAD CUTTING SERIES

· 绷缝787自动剪线系列 ·



MAIN FEATURES · 主要特点 ·

1. 伺服电机、噪音小、振动小、温升低。
 2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
 3. 停针定位准确，精度 $\leq \pm 1$ 。
 4. 大力矩输出，高速响应，启停迅速。
 5. 更高效、更省电、更安全、更环保。
 6. 界面简便、功能强大的面板可供参数任意调整设定。
 7. 适用广，可适用于薄、中、厚料。
1. Servo motor, low noise, low vibration, low temperature rise.
 2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
 3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
 4. Strong torque output, high-speed response, quick start and stop.
 5. More efficient, more power saving, safer and more environmentally friendly.
 6. Simple interface and powerful panel for parameter adjustment and setting.
 7. Wide application, can be applied to thin, medium and thick materials.

APPLICABLE MODEL · 使用机型 ·



电控
Electronic control

787长轴
major axis

787空心轴
Hollow shaft

787电机罩壳
Motor housing

STITCHING AUTOMATIC THREAD CUTTING SERIES

· 绷缝自动剪线系列 ·



MAIN FEATURES · 主要特点 ·

1. 伺服电机、噪音小、振动小、温升低。
2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
3. 停针定位准确，精度 $\leq \pm 1$ 。
4. 大力矩输出，高速响应，启停迅速。
5. 更高效、更省电、更安全、更环保。
6. 界面简便、功能强大的面板可供参数任意调整设定。
7. 适用广，可适用于薄、中、厚料。

1. Servo motor, low noise, low vibration, low temperature rise.
2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
4. Strong torque output, high-speed response, quick start and stop.
5. More efficient, more power saving, safer and more environmentally friendly.
6. Simple interface and powerful panel for parameter adjustment and setting.
7. Wide application, can be applied to thin, medium and thick materials.

APPLICABLE MODEL · 使用机型 ·



FOUR-NEEDLE SIX-THREAD SERIES OF SEAWEWING MACHINE

· 拼缝机四针六线系列 ·



MAIN FEATURES · 主要特点 ·


1. 伺服电机、噪音小、振动小、温升低。
 2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
 3. 停针定位准确，精度 $\leq \pm 1$ 。
 4. 大力矩输出，高速响应，启停迅速。
 5. 更高效、更省电、更安全、更环保。
 6. 界面简便、功能强大的面板可供参数任意调整设定。
 7. 适用广，可适用于薄、中、厚料。
1. Servo motor, low noise, low vibration, low temperature rise.
 2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
 3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
 4. Strong torque output, high-speed response, quick start and stop.
 5. More efficient, more power saving, safer and more environmentally friendly.
 6. Simple interface and powerful panel for parameter adjustment and setting.
 7. Wide application, can be applied to thin, medium and thick materials.

KNITTING MACHINE SCISSOR SET SERIES · 拼缝机剪线刀组系列 ·



OVERSEAM DIRECT DRIVE SERIES

· 包缝直驱系列 ·

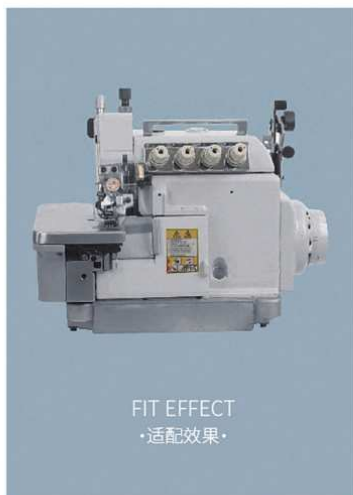

直驱抬压脚电控
Direct drive lifting
foot electronic control



直驱电控
Direct drive electronic control



大和6125
Yamato 6125



直驱脚控
Direct drive pedals

MAIN FEATURES · 主要特点 ·

1. 节能省电: 可比离合器电机节能75%。
2. 效率: 起步快, 停车准, 可任意调节上下定位, 工作效率可提高20%。
3. 外观: 电机体积小外形美观, 安装操作方便。
4. 震动噪音: 震动噪音小, 对操作工不易产生疲劳可大大提高工作效率。
5. 可做110V - 220V双电压, 抬压脚功能通用电控。

1. Energy saving and power saving: 75% energy saving compared to clutch motor.
2. Efficiency: fast start, accurate parking, can adjust up and down positioning at will, and work efficiency can be increased by 20%.
3. Appearance: the motor is small in size and beautiful in appearance, and it is easy to install and operate.
4. Vibration noise: the vibration noise is small, and the operator is not easy to fatigue, which can greatly improve the work efficiency.
5. Can do 110V - 220V dual voltage, lifting foot function general electronic control.

APPLICABLE MODEL · 使用机型 ·



747



800



EX



700



3300



747E



6714



6125

STITCHED DIRECT DRIVE SERIES

· 绷缝直驱系列 ·



MAIN FEATURES · 主要特点 ·

1. 节能省电: 可比离合器电机节能75%。
2. 效率: 起步快, 停车准, 可任意调节上下定位, 工作效率可提高20%。
3. 外观: 电机体积小外形美观, 安装操作方便。
4. 震动噪音: 震动噪音小, 对操作工不易产生疲劳可大大提高工作效率。
5. 可做110V - 220V双电压, 抬压脚功能通用电控。

1. Energy saving and power saving: 75% energy saving compared to clutch motor.
2. Efficiency: fast start, accurate parking, can adjust up and down positioning at will, and work efficiency can be increased by 20%.
3. Appearance: the motor is small in size and beautiful in appearance, and it is easy to install and operate.
4. Vibration noise: the vibration noise is small, and the operator is not easy to fatigue, which can greatly improve the work efficiency.
5. Can do 110V - 220V dual voltage, lifting foot function general electronic control.

EXPLODED VIEW OF THE PRODUCT · 产品分解图 ·



STITCHING 500 IN ONE AUTOMATIC THREAD CUTTING MOTOR & ELECTRONIC CONTROL SERIES

· 绷缝500一体自动剪线电机电控系列 ·



MAIN FEATURES · 主要特点 ·

1. 伺服电机、噪音小、振动小、温升低。
 2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
 3. 停针定位准确，精度 $\leq \pm 1$ 。
 4. 大力矩输出，高速响应，启停迅速。
 5. 更高效、更省电、更安全、更环保。
 6. 界面简便、功能强大的面板可供参数任意调整设定。
 7. 适用广，可适用于薄、中、厚料。
1. Servo motor, low noise, low vibration, low temperature rise.
 2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
 3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
 4. Strong torque output, high-speed response, quick start and stop.
 5. More efficient, more power saving, safer and more environmentally friendly.
 6. Simple interface and powerful panel for parameter adjustment and setting.
 7. Wide application, can be applied to thin, medium and thick materials.

AUTOMATIC WIRE CUTTER SET SERIES · 自动剪线刀组系列 ·



綑縫機型對照表

Interlock Sewing Machine Model Comparison Table

配置 Configuration 型號Model number	Under bed trimmer device UT	Wiper device WP	New upper trimmer device ST	Motor S(servo) 110V or 220V	用途 USE
UT/WP	✓	✓	-	✓	二針三線，起縫無線頭 2 needles 3 threads, without leaving threads at the beginning of stitches.
UT/ST	✓	-	✓		二針五線，自動剪線 3 needles 5 threads, cutting the thread automatically
UT/ST/WP	✓	✓	✓	✓	二針三線/三針五線，(ST/WP)需拆換 2 needles 3 threads, without leaving threads at the beginning of stitches.

全機種皆有電動/氣動2種形式 All can be used for pneumatic and electric type


*伺服器可選購 Servo motor can be purchased optionally

品牌 Brand	刀組型號 Knife Model	機型 Model
飛馬 PEGASUS	W500	W500
		W3500
		W500PC
	W600	W664
	W1600	W600PC
	W2600	W2600
	W3600	W3622
大和 YAMATO	W200	WT200P
	VC1700	VC1700
	VC1790	VC1790
	VC2700	VC2700
	VG2700	VG2700
		VG3721
		VGS2700
	VE2700	VE2700
		VES2700
	VT1500	VT1500
銀箭 SIRUBA	VF2500	VF2400
		VFS2500
	FD-62	FD-62-DRY
	C007J	C007J
	C007K	C858K/C007K
日星 SUNSTAR	S007K	S007K
	F007J	F007J
	F007K	F858/F007K
青本 QINGBEN	SC7300	SC7300
標準 TYPICAL	VT1500	QB1500
		GK32500
		GK350
	VF2500	GK335
		GK32700
		GK337
兄弟 BROTHER	VC2700	GK370D

品牌 Brand	刀組型號 Knife Model	機型 Model
中捷 ZOJE	ZJ2500	ZJC2500
		ZJC2500-156M-BD-D3B
勝家 SINGER	C007J	SG797-CB356
		SINGER 2542D-356-01
		SINGER 2542K-356-01
杰克 JACK	W664	JK8669(內置)
	BRUCE 664	JK8669(外置)
	W264	JK8670
星菱 SHING LING	VG888	VG888
	VG888A	VG888A
	VG888S	VG888S
	VF2500	FG666
精機(寶獅) KINGTEX		FG798
	VC2700	CT6500
	CT9000	CT9000
	CT9713	CT9613
		CT9713
星銳 SHING RAY	VF2500	FT6500
		FT7000
	FW787	FW787
關西(森本) KANSAI SPECIAL	FW720	FW720
	FW740	FW740
	RX9803 (內置)	RX9803 (內置)
重機 JUKI	REX9803 (外置)	REX9803 (外置)
	RX1103	RX1103
	KANSAI4412	KANSAI4412
兄弟 BROTHER	KANSAI4413	KANSAI4413
	MF7823	MF7823
	MF7723	MF7723
		MF7523
	MF7923	MF7923
兄弟 BROTHER	JUKI 1900A	JUKI 1900A
	430F	430F

套结机剪线头装置

Bartacking Sewing Machine Automatic Thread Trimming Device

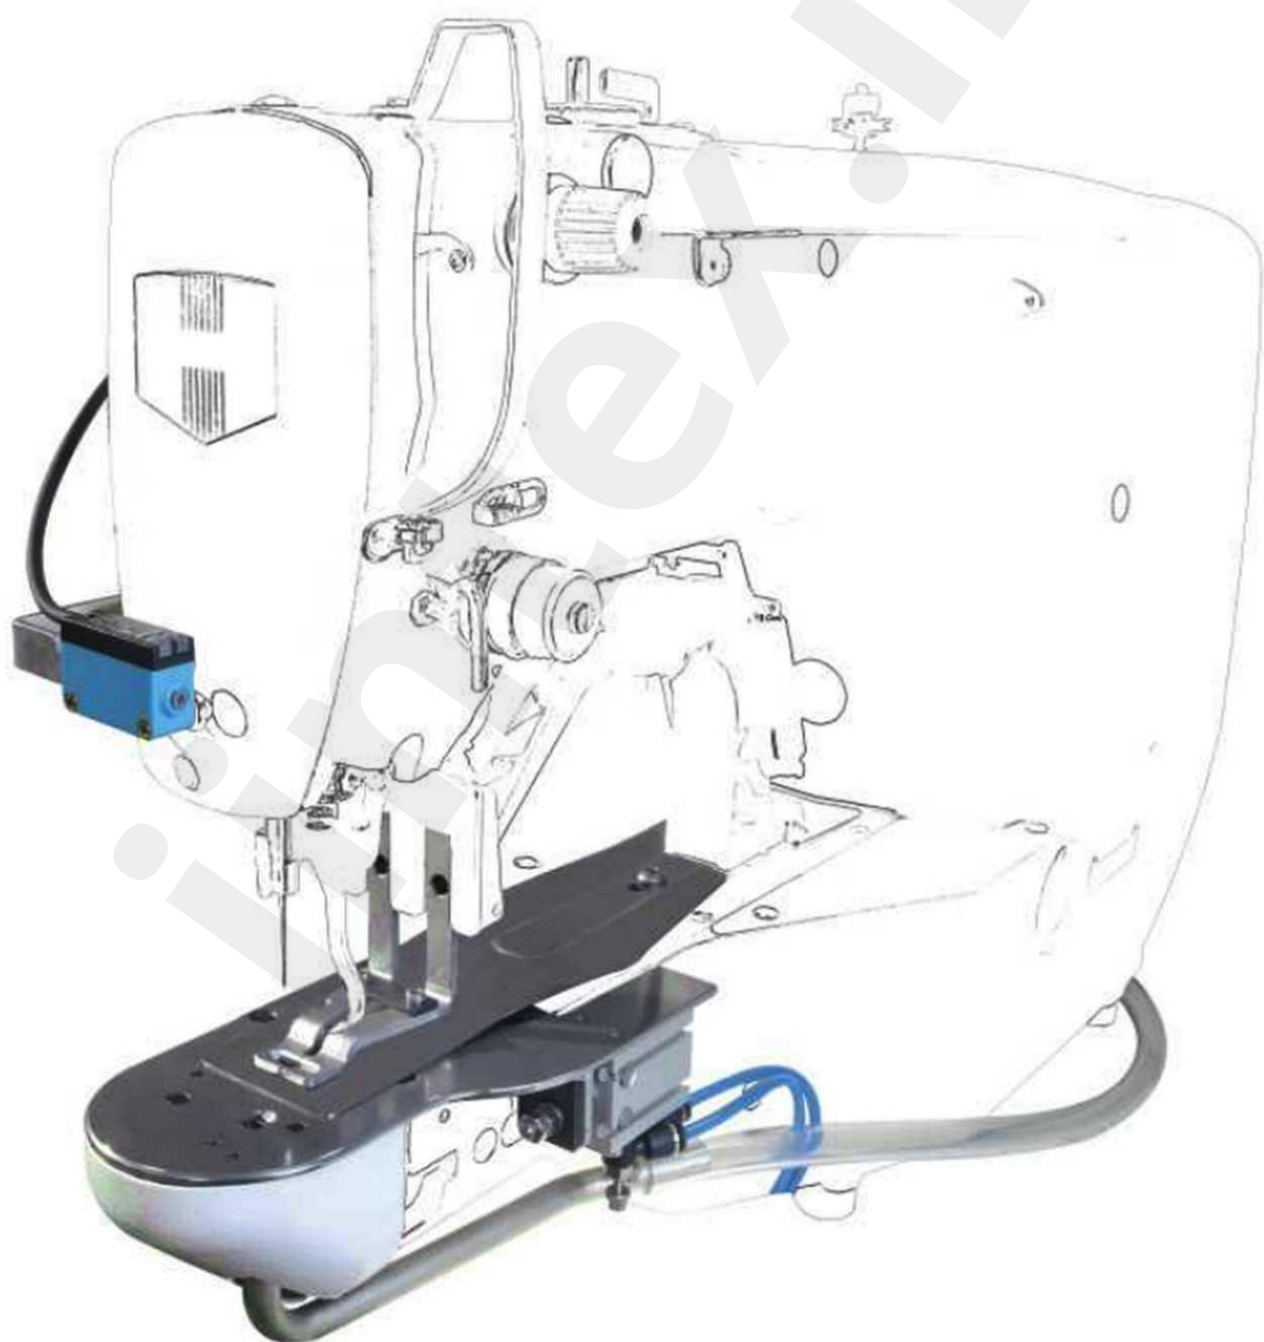

BROTHER430F BARTACKING SEWING MACHINE

• 兄弟430F套结机 •



产品的研发始终与时俱进

Product research is always advancing with the times

Brother 430F 針板組件 Needle Assembly



托板
Pallet



壓腳組件
Pressure Foot Component



風管組件
Air duct assembly



電磁閥組件
Electromagnetic valve assembly



控制器
Controller



傳感器支架
Sensing bracket



調壓閥組件
Pressure valve assembly



吹風集成裝置
Blowing integrated device



零部件
Accessories

JUKI 1900A BARTACKING SEWING MACHINE

• 重机1900A套结机 •



执着的坚持产品的质量

Adhere to the quality of products

JUKI 1900A 針板組件 Needle Assembly



托板
Pallet



壓腳組件
Pressure Foot Component



風管組件
Air duct assembly



電磁閥組件
Electromagnetic valve assembly



控制器
Controller



傳感器支架
Sensing bracket



調壓閥組件
Pressure valve assembly



吹風集成裝置
Blowing integrated device



零部件
Accessories

DIRECT DRIVE 500 IN ONE MOTOR & ELECTRONIC CONTROL SERIES

· 直驱500一体电机电控系列 ·



直驱一体电控橘红色
Direct drive 500 integrated
electronic control orange red



直驱一体电机
Direct drive integrated motor



直驱脚控
Direct drive foot control

MAIN FEATURES · 主要特点 ·

1. 节能省电: 可比离合器电机节能75%。
2. 效率: 起步快, 停车准, 可任意调节上下定位, 工作效率可提高20%。
3. 外观: 电机体积小外形美观, 安装操作方便。
4. 震动噪音: 震动噪音小, 对操作工不易产生疲劳可大大提高工作效率。
5. 可做110V - 220V双电压, 抬压脚功能通用电控。

1. Energy saving and power saving: 75% energy saving compared to clutch motor.
2. Efficiency: fast start, accurate parking, can adjust up and down positioning at will, and work efficiency can be increased by 20%.
3. Appearance: the motor is small in size and beautiful in appearance, and it is easy to install and operate.
4. Vibration noise: the vibration noise is small, and the operator is not easy to fatigue, which can greatly improve the work efficiency.
5. Can do 110V - 220V dual voltage, lifting foot function general electronic control.

EXPLODED VIEW OF THE PRODUCT · 产品分解图 ·



STITCHING VC008 INTEGRATED AUTOMATIC THREAD CUTTING SERIES

· 绷缝VC008一体自动剪线系列 ·



自动剪线电控
Automatic wire cutting
electronic control



VC008一体电机
VC008 integrated motor




绷缝脚控通用
Stitched foot control is universal

MAIN FEATURES · 主要特点 ·

1. 伺服电机、噪音小、振动小、温升低。
 2. 电磁铁短路保护、软硬件过流 | 过压 | 欠压保护。
 3. 停针定位准确，精度 $\leq \pm 1$ 。
 4. 大力矩输出，高速响应，启停迅速。
 5. 更高效、更省电、更安全、更环保。
 6. 界面简便、功能强大的面板可供参数任意调整设定。
 7. 适用广，可适用于薄、中、厚料。
1. Servo motor, low noise, low vibration, low temperature rise.
 2. Electromagnet short circuit protection, software and hardware overcurrent | overvoltage | undervoltage protection.
 3. The needle stop positioning is accurate, and the accuracy is $\leq \pm 1$.
 4. Strong torque output, high-speed response, quick start and stop.
 5. More efficient, more power saving, safer and more environmentally friendly.
 6. Simple interface and powerful panel for parameter adjustment and setting.
 7. Wide application, can be applied to thin, medium and thick materials.

SCISSOR SET · 剪线刀组 ·

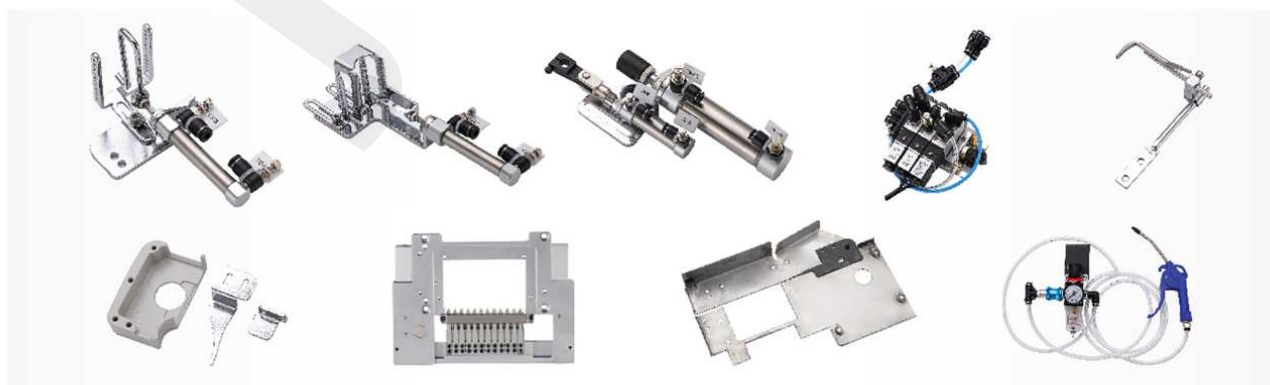

DIRECT DRIVE VC008 IN ONE MOTOR & ELECTRONIC CONTROL SERIES

· 直驱VC008一体电机电控系列 ·



直驱一体电控
Direct drive integrated
electronic control



直驱一体电机
Direct drive integrated motor



直驱脚控
Direct drive foot control

MAIN FEATURES · 主要特点 ·

1. 节能省电: 可比离合器电机节能75%。
2. 效率: 起步快, 停车准, 可任意调节上下定位, 工作效率可提高20%。
3. 外观: 电机体积小外形美观, 安装操作方便。
4. 震动噪音: 震动噪音小, 对操作工不易产生疲劳可大大提高工作效率。
5. 可做110V - 220V双电压, 抬压脚功能通用电控。

1. Energy saving and power saving: 75% energy saving compared to clutch motor.
2. Efficiency: fast start, accurate parking, can adjust up and down positioning at will, and work efficiency can be increased by 20%.
3. Appearance: the motor is small in size and beautiful in appearance, and it is easy to install and operate.
4. Vibration noise: the vibration noise is small, and the operator is not easy to fatigue, which can greatly improve the work efficiency.
5. Can do 110V - 220V dual voltage, lifting foot function general electronic control.

EXPLODED VIEW OF THE PRODUCT · 产品分解图 ·



AN ENERGY-SAVING MOTOR IS ATTACHED UNDER THE SPLIT

· 分体下挂节能马达 ·



MAIN FEATURES · 主要特点 ·

1. 节能省电: 可比离合器电机节能75%。
2. 效率: 起步快, 停车准, 可任意调节上下定位, 工作效率可提高20%。
3. 外观: 电机体积小外形美观, 安装操作方便。
4. 震动噪音: 震动噪音小, 对操作工不易产生疲劳可大大提高工作效率。
5. 可做110V - 220V双电压, 抬压脚功能通用电控。

1. Energy saving and power saving: 75% energy saving compared to clutch motor.
2. Efficiency: fast start, accurate parking, can adjust up and down positioning at will, and work efficiency can be increased by 20%.
3. Appearance: the motor is small in size and beautiful in appearance, and it is easy to install and operate.
4. Vibration noise: the vibration noise is small, and the operator is not easy to fatigue, which can greatly improve the work efficiency.
5. Can do 110V - 220V dual voltage, lifting foot function general electronic control.

AN ENERGY-SAVING MOTOR IS ATTACHED TO THE INTEGRATED UNDERNEATH · 一体下挂节能马达 ·

功率系列:


450w
550w
750w
1000w
1200w



POWER TRANSFORMER 110V TO 220V · 电源变压器110V转220V ·

功率系列:

500W
1000W
2000W
3000W



耐高温纯铜线圈
采用优质耐高温纯铜线圈, 导电性能出色电阻率低, 温升低, 质量可靠使用效率高

BRACE DEVICE · 撑开装置 ·



外置剪线电控
External wire cutting
electronic control



撑开装置电控
The stretching device is
electronically controlled



撑开装置
Brace device



HE XIN ACCESSORIES · 贺欣配件 ·



脚控
Foot control



787编码器
787 encoder



感应线
Induction line



787电机
787 encoder



四针六线电机
Four-pin six-wire motor



绷缝电机
Stitching motor

CHAIN CUTTER ASSEMBLY SERIES (FOR OVERLOCK MACHINE)

• 包缝机切线刀组(1) •

飞马 PEGASUS		
刀组型号 Model	刀组款式 Type	配对机型 Available Model
KS304272-91Y	侧吸 Vertical Type	L52、M652
KS304294-91Y		M752、M852 注：杰克788
KS6S00060-91Y		MX5200
KS308046-91Y		EX5200、LX5200 注：杰克798
KS308113-91Y		EX5200
VT		E52
KH303753-91Y	平吸 Flat Type	L32、M652
KH304308A-91Y		M732、M832
KH6S0002A-91Y		MX3200
KH308020A-91Y		EX3200、LX3200
KH308100A-91Y		EXT3200



重机 JUKI		
刀组型号 Model	刀组款式 Type	配对机型 Available Model
T0-36	侧吸 Vertical Type	M0-2304/2314/2404/2414
T0-42		M0-3604/3614/3904/3914/6704/6714/6904/6914
TS-42		M0-3304/3314
KS308046-91Y		M0-6500S/6800
T0-22	平吸 Flat Type	M0-2500
T0-35		M0-2300/2400
T0-41		M0-3600/3900/6700/6900
TF-35		M0-3300



大和 YAMATO		
刀组型号 Model	刀组款式 Type	配对机型 Available Model
2109917 (K2)	侧吸 Vertical Type	AZ6000 Series、AZ8020
2159901 (K2)		CZ6000、AZ7000/8000/8400、AZF8000/8400
2109906 (K1)	平吸 Flat Type	AZ6000 Series
2159900 (K1)		CZ6500、AZ7500/8500/8600、AZF8500





CHAIN CUTTER ASSEMBLY SERIES (FOR OVERLOCK MACHINE)

• 包缝机切线刀组(2) •

宝狮 KING TEX		
刀组型号 Model	刀组款式 Type	配对机型 Available Model
SS-023	侧吸 Vertical Type	SH-6003/6004/7003/7004/A43
SS-033		UH8000/9000
US-027	平吸 Flat Type	SHG-6005/7005
US-035		SH-6000/7000
US-036		SHF Series
US-040		UH8000/9000
兄弟 BROTHER		
刀组型号 Model	刀组款式 Type	配对型号 Available Model
KS308046-EF4	侧吸 Vertical Type	EF4-C11/C21/N21
S23547-001	平吸 Flat Type	V&N Series
S43547-001		V&N Series



银箭 SIRUBA		
刀组型号 Model	刀组款式 Type	配对机型 Available Model
VT	侧吸 Vertical Type	737F、747F 注: 杰克768、766
KS308046-91Y		988、747K
CT	平吸 Flat Type	737F、747F、757F、767F
KH308020A-91Y		757K



自动斩刀 AUTO CUTTEV			
刀组型号 Model	刀组款式 Type	配对机型 Available Model	备注
ATK0104	平吸 Flat Type	银箭 SIRUBA: 988	
		宝狮 KING TEX: UH8000/9000	
		重机 JUKI: M0-6500S	
		飞马 PEGASUS: EX5200、LX5200、Mx5200	
		飞马 M700 series M800 series	
ATK0105		银箭 SIRUBA: 747	
ATK0106		飞马 PEGASUS: E52	
		大和 YAMATO: AZ6020/8020	
ATK0107		重机 JUKI: 6700 Series	
ATK0108		飞马 PEGASUS: EXT5200	



PNEUMATIC DUST COLLECTING DEVICE FOR SEWING MACHINE

• 包缝机气动集尘装置 •



包缝吸风装置（抽屉式）RK-1180-ST



优点：

1. 创造优良环境:有效利用空气里对挡环、切屑和前盖内的灰尘进行强力集尘,保持清洁舒适的作业环境。
 2. 降低成本:省时、省力,有效维护衣车运转,延长衣车寿命。
 3. 易安装,适合所有品牌包缝机。
 4. 可选择配置抬压脚装置。
1. Create a good environment: effectively use the air to collect dust in the retaining ring, chips and dust in the front cover to keep clean Comfortable working environment.
2. Reduce cost: save time and effort, effectively maintain the operation of the clothes car, and extend the life of the clothes car.
3. Easy to install, suitable for all brands of over stitching machine.
4. Optional press foot lifting device.

装配图

RK-1180-ST



配件：



1000A-3
三位脚控开关组
Three-way foot control
switch group



1000A-2
两位脚控开关组
two-way foot control
switch group



1000B
吸屑漏斗组
Waste&Lint Funnel
Assembly



1000C
真空发生组
Vacuum Generation
Assembly



1000D
Y形管固定架组
Hoop



1000E
大消音器
Silencer Assembly



1000F
集尘圆盖
Suction Cover



H6
气管 (φ6xφ4mm)
Trachea



1000G
箍圈
Hoop



1080F
线屑、布屑收集组
Lint Collector Assembly



H14
透明胶管 (φ14mm)
Hose



H25
透明筋条软管 (φ25mm)
Hose



H30
透明筋条软管 (φ25mm)
Hoser



H38
透明筋条软管 (φ38mm)
Hoser



AFR-2000L
调压过滤阀组
Air Filter Regulator Assembly




30转25 & 38转30接头
30 to 25 & 38 to 30
Connector



SV-100
单电磁阀组
Single solenoid valve



SV-200
双组电磁阀
two solenoid valve



SV-300
三组电磁阀
three solenoid valve



PL-100
抬压脚气缸
Presser Foot Lift

PNEUMATIC DUST COLLECTING DEVICE FOR SEWING MACHINE

• 包缝机气动集尘装置 •

配离合器电机 For Clutch Motor

Model	1000A-2	1000A-3	1000B	1000C	1000D	1000E	1000F	1080F	1000G &H6	H14	H38	PL-100
RK-1110	●		●	●	●	●	●		●	●	●	
RK-1110-ST		●	●	●	●	●	●		●	●	●	●
RK-1180	●		●	●	●	●		●	●	●	●	
RK-1180-ST		●	●	●	●	●		●	●	●	●	●

配伺服电机 For Servo Motor

Model	SV-100	SV-200	1000B	1000C	1000D	1000E	1000F	1080F	1000G &H6	H14	H38	PL-100
RK-1111	●		●	●	●	●	●		●	●	●	
RK-1112		●	●	●	●	●	●		●	●	●	●
RK-1181	●		●	●	●	●		●	●	●	●	
RK-1182		●	●	●	●	●		●	●	●	●	●



包缝机气动集尘装置/Pneumatic dust collecting device for sewing machine


Model	1000A-2	1000C	1000D	1000E	1000F	1080F	1000G &H6	H25	H30	XX-888
RK-1210	●			●	●		●	●		●
RK-1280	●			●		●	●	●		●
RK-1310	●	●	●	●	●		●		●	●
RK-1380	●	●	●	●		●	●		●	●
RK-1510	●			●	●		●		●	●
RK-1580	●			●		●	●		●	●

FULL AUTO TAPE CUTTER SYSTEM WITH MOTOR CONTROLLER FOR FL

• RK-2120 全自动切带装置 •



滚条切割机-极具多种功能
TAPE CUTTER-MULTI-FUNCTIONAL



■ 专为切滚条、截缎带、剪丝带或切弹性织物等等设计
DESIGNED TO CUT TAPES, LACES, RIBBONS, ELASTICS, ETC.

● 具有保护手指功能, 综合完整的喷气运送装置
FINGER PROTECTION WITH INTEGRATED BLOW OUT DEVICE.

● 能畅通无阻的运送缝纫材料
TRANSPORT OF THE SEWING MATERIAL WITHOUT JAMMING

■ 光电测试自动切带: 可自动前、后切带。含E8膝盖触式切带 (选择配件: 左、右手触式切带)
AUTO CUTTING BY PHOTO-SENSOR: CUT BEFORE AND FINISH SEWING MATERIAL AUTOMATICALLY. INCLUDING E8 KNEE CUTTING SWITCH (OPTIONAL PARTS: LEFT OR RIGHT MANUAL SWITCH)

● 可切宽度50mm
CUTTING WIDTH OF 50mm

可选配气缸支架
Cylinder support is available



AFR-2000L 调压过滤阀组
Air Filter Regulator Assembly



气动膝撑组件
Pneumatic component



Tk刀
TK knife



电控箱
Electric cabinet



2000C 安装支架
2000C Mounting brackets



安装支架
Mounting brackets



显示屏
Display screen



脚踏板
Footboard

SHELL LACE DEVICE(WRAP SEAM DIRECT DRIVE/SEWN BELT PULLEY)

• 贝型花边装置(包缝直驱/包缝皮带轮) •



■ 适用于各类单针3线拷克车, 安装简便, 只需调整凸轮角度与沙拉组便可变化多种贝形样式。
Can easily be installed for all kinds of single needle three threads overlock machines.
It produces various patterns of fancy ornamental stitch by combination of cams and adjustment of thread tensions.




SHELL LACE DEVICE(WRAP SEAM DIRECT DRIVE/SEWN BELT PULLEY)

• 贝型花边装置(绷缝直驱/绷缝皮带轮) •



■ 适用于各类绷缝车, 安装简便, 只需调整凸轮角度与沙拉组便可变化多种贝形样式。
Can easily be installed for all kinds of Flat sewing machine.
It produces various patterns of fancy ornamental stitch by combination of cams and adjustment of thread tensions.

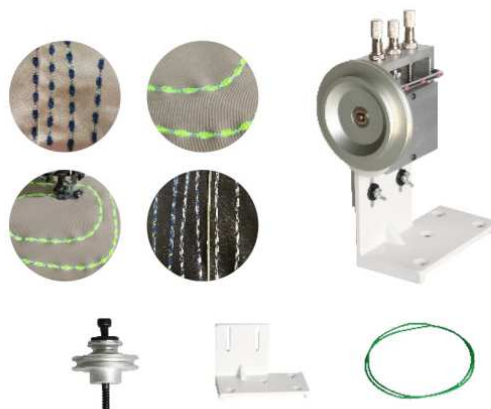

FULL OPTION PNEUMATIC CHAIN/FLAT CUTTER TRIMMING SYSTEM

• 包缝机智能气动砍刀剪线装置 •



F 3 : 直驱马达
Direct drive motor



INTELLIGENT PNEUMATIC CUTTER THREADCUTTING DEVICE FOR SEWING MACHINE

• 绷缝机智能气动砍刀剪线装置 •



373步进加装款



781 ELECTROMAGNET ADD-ON INTELLIGENT PNEUMATIC CUTTER THREAD CUTTING DEVICE FOR SEWING MACHINE

● 781 电磁铁加装款绷缝机智能气动砍刀剪线装置



控制器
controller



电机组
motor



脚控
pedal



电机底座
Engine base



剪线电磁铁
Wire-cutting electromagnet




软连接
Soft connection



感应器组件
Sensor Assembly



绕线器
A winding device

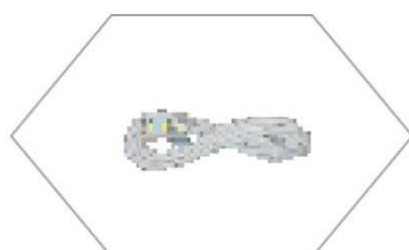

LED灯线
lamp



电机罩壳
Engine housing



打线轮罩
Protective shell



螺丝包
screws

AUXILIARY DEVICE

• 辅助装置 •




ATK-RS-FL 全自动斩刀装置
Automatic cutting device



S-ATK-FL 半自动斩刀装置
Semi-automatic cutting device



LT-1080 剪裤耳装置
Ear cutting device



自动感应开关
Automatic induction switch



计针器
A needle counter



手动补刀开关
Manual knife switch



切刀组
Cutter set



平刀车用固定支架
Fixing bracket for flat tool car



外置剪线电控
External wire-cutting electronic control

装置优点：Device Advantages:

1. 感应器感应到布料边缘后会自动降下剪刀，剪断布条或空线链。
1. After sensing the edge of the cloth, the sensor will automatically lower the scissors to cut the cloth strip or empty chain.
2. 根据针数控制可自由调节布条或空线链遗留长度，无论谁来缝纫都可使遗留长度一致。
2. According to the number of needles, the remaining length of cloth or empty thread chain can be adjusted freely, no matter who will sewl can make my legacy length consistent.



气压表组件
Barometer Assembly



手动补刀开关
Manual knife switch



斩刀电控盒
Chopper Electric Control Box




DY车用固定支架
DY mounting bracket



人字车，车用固定支架
Herringbone, fixing bracket for



平车用固定支架
Fixed support flat cars



刀架底座
Tool rest base



刀片挡板
Blade Baffle



刀片
Blade



• FULL FUNCTION DIRECT DRIVE CONTROL SYSTEM FOR LOCKSTITCH MACHINE



CONFIGURATION TABLE

Model	Voltage	Rated power	speed	Peak torque	Motor type	Sewing Fabric
ES-4-SN	220±20%AC	550W	5000rpm	5Nm	Direct drive	Medium-thick
Trimming	Wlping	Presser Foot	Back Stitch	Needle Positing	Speed Control	Overload Protection
★	★	★	★	★	★	★

Easy Installation:

Motor and control box built-in one, structure much easier

More function :

Needle Position Up and Down, Automatic trimming , Presser footlift and so on

High Compatibility:

Suit for all belt type lockstitch machine to Direct drive machine, such as JUKI , BROTHER, SIRUBA,SUNSTAR, GOLDEN WHEEL Brand and other Brand

Super energy saving:

More than 40% energy saving, the effect same as servo

Super high efficient:

Large power, fast to stop, max speed reach to 5000RPM